



Spur
Gears

Helical
Gears

Internal
Gears

Racks

CP Racks
& Pinions

Miter
Gears

Bevel
Gears

Screw
Gears

Worm
Gear Pair

Bevel
Gearboxes

Other
Products



■ Features

Characteristics of Gear Couplings

- SV and SVI series are made according to the automotive involute spline standard, JIS D 2001: 1959 (FLAT ROOT SIDE FIT, Backlash 0.06 to 0.15)
- Involute spline shafts and bushings are thermal refined to have good abrasion-resistance.
- Spline bushings may be made in CAC (bronze) type material as a special custom order item.

■ Points to observe during use

- Be sure not to bend shafts or break teeth when performing secondary operations on SV Involute Spline shafts.
- When using SVI Spline Bushings with sliding movement, lubrication is necessary on the sliding surface. To prevent scuffing, it is recommended to apply lubricating grease. If used in applications where oil contamination is not desirable, solid lubrication is recommended.

■ The surface strength of Spline

The design concept of the spline surface strength is the same as that of a key. Here is the formula for the allowable transmission force (N) of spline.

$$F = \eta \cdot z \cdot h_w \cdot l \cdot \sigma$$

And the formula of allowable torque T (N · m) of spline with respect to the surface strength.

$$T = \frac{F \cdot d_w}{2000}$$

In designing a spline shafts, besides considering the surface strength, we should take into account the torsional and bending stresses of the spline.

Here

η : Contact ratio of surface → 0.75 (assumed)

z : Number of teeth → number of teeth (z) of spline from the table

h_w : Contact depth of tooth → 1.485

l : Contact length of spline → Total length (A) of involute spline bushing


σ : Allowable surface stress of spline → 19.61MPa (2kgf/mm²) (assumed)

d_w : Contact diameter (mm) → Tip diameter of spline shaft $D - h_w$

Application



Assembly Example: KHK Stock Gears Sample Unit

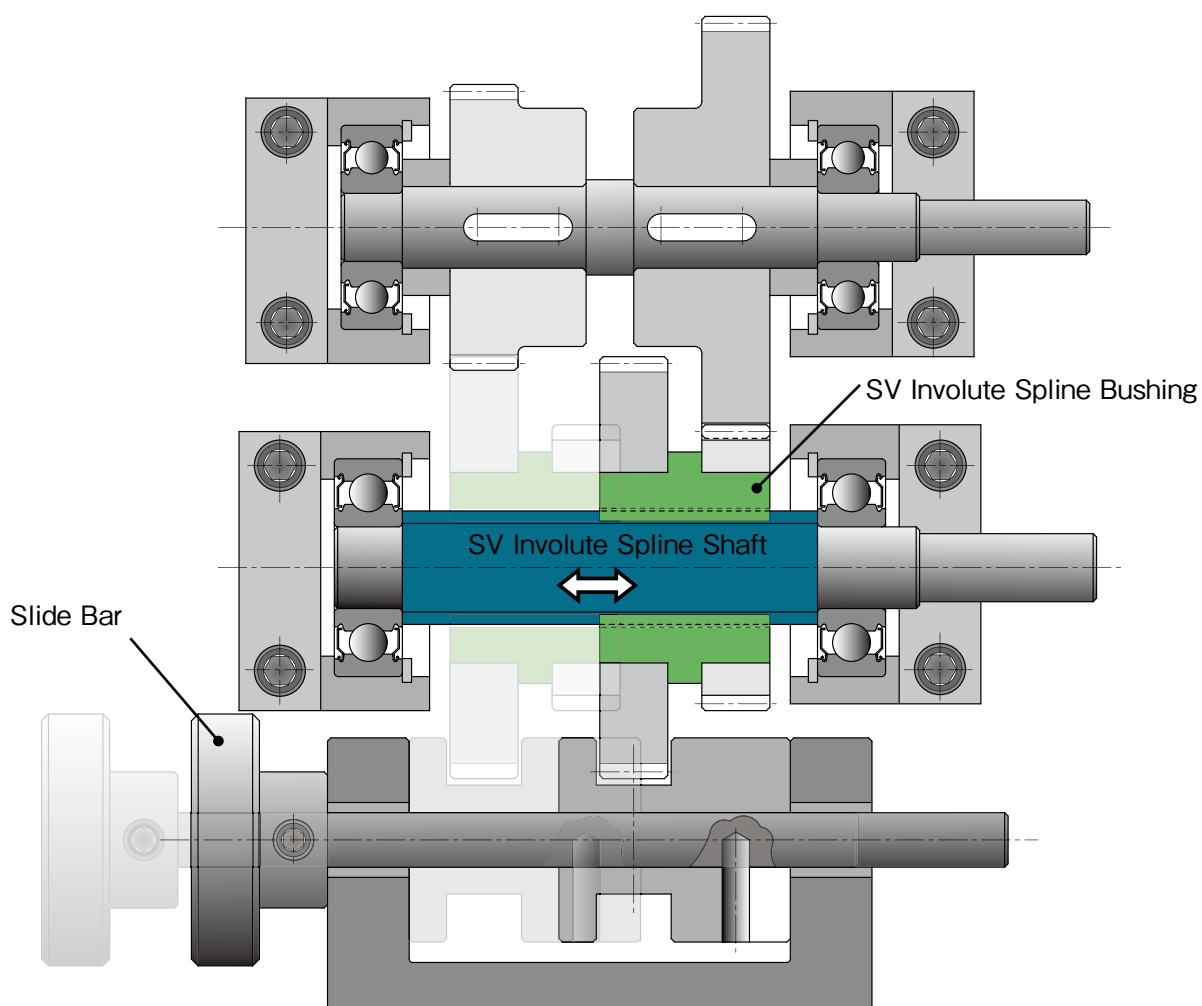

SV Involute Spline Shafts are used in shift transmission mechanisms

Spur
GearsHelical
GearsInternal
Gears

Racks

CP Racks
& PinionsMiter
GearsBevel
GearsScrew
GearsWorm
Gear PairBevel
GearboxesOther
Products




SV Involute Spline Shafts

Module 1.667



| Specifications | |
|----------------|-----------------|
| Gear teeth | Stub teeth |
| Pressure angle | 20° |
| Material | S45C |
| Heat treatment | Thermal refined |
| Tooth hardness | 225 ~ 260HB |

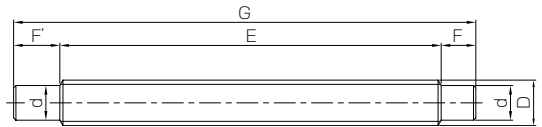

TA

| Catalog No. | Module | No. of teeth | Shape | Outside dia. | Shaft dia. | Face width | Shaft length (R) | Shaft length (L) | Total length | Backlash (mm) | Weight (kg) |
|-----------------|---------------|--------------|-------|--------------|--|------------|------------------|------------------|--------------|---------------|-------------|
| | | | | D | $d \begin{smallmatrix} +0.22 \\ +0.15 \end{smallmatrix}$ | E | F | F' | G | | |
| SV17-170 | m1.667 | 8 | TA | 16.67 | 13 | 135 | 20 | 15 | 170 | 0.06~0.15 | 0.26 |
| SV20-200 | | 10 | TA | 19.67 | 15 | 165 | 20 | 15 | 200 | 0.06~0.15 | 0.43 |
| SV25-250 | | 13 | TB | 24.67 | 20 | 220 | — | 30 | 250 | 0.06~0.15 | 0.88 |
| SV30-300 | | 16 | TB | 29.67 | 25 | 270 | — | 30 | 300 | 0.06~0.15 | 1.55 |

[Caution on Secondary Operations] ① Be sure not to bend shafts or break teeth when performing secondary operations on SV Involute Spline shafts.

- Spur Gears
- Helical Gears
- Internal Gears
- Racks
- CP Racks & Pinions
- Miter Gears
- Bevel Gears
- Screw Gears
- Worm Gear Pair
- Bevel Gearboxes
- Other Products




SVI Involute Spline Bushings

Module 1.667




| Specifications | |
|----------------|-----------------|
| Gear teeth | Stub teeth |
| Pressure angle | 20° |
| Material | S45C |
| Heat treatment | Thermal refined |
| Tooth hardness | 225 ~ 260HB |



T1

| Catalog No. | Module | No. of teeth | Shape | Internal dia. | Outside dia. | Face width | Allowable torque (N · m) | Allowable torque (kgf · m) | Backlash (mm) | Weight (kg) |
|-----------------|---------------|--------------|-------|---------------|--------------|------------|--------------------------|----------------------------|---------------|-------------|
| | | | | A | D | E | Surface durability | Surface durability | | |
| SVI17-40 | m1.667 | 8 | T1 | 13.7 | 40 | 25 | 33.2 | 3.38 | 0.06~0.15 | 0.21 |
| SVI20-45 | | 10 | | 16.7 | 45 | 30 | 59.6 | 6.08 | 0.06~0.15 | 0.31 |
| SVI25-55 | | 13 | | 21.7 | 55 | 38 | 125 | 12.8 | 0.06~0.15 | 0.57 |
| SVI30-65 | | 16 | | 26.7 | 65 | 45 | 222 | 22.6 | 0.06~0.15 | 0.93 |

[Caution on Product Characteristics] ① The allowable torques are calculated based on "The surface strength of Spline".
 ② It is essential to apply lubricant on contact surface of the spline shaft and the hub. To prevent scuffing, it is recommended to apply lubricating grease. If used in applications where oil contamination is not desirable, solid lubrication is recommended.

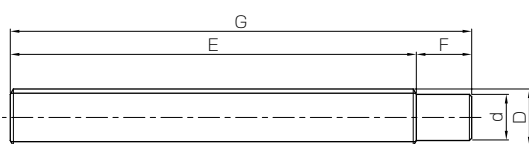Involute Spline Shafts**TB**Spur
GearsHelical
GearsInternal
Gears

Racks

CP Racks
& PinionsMiter
Gears**SVI****Involute Spline Bushings**Bevel
GearsScrew
GearsWorm
Gear PairBevel
Gearboxes**Other
Products**